

SECTION 4

ADAPTERS AND REDUCERS




5/16" ceramic to carpet adapters for use where (5/16") 8mm tile meets low pile carpet or other 1/4" flooring.

Finishes: BBR, BCL, SCA, SCP, SGA, MIL, SBK, STI, SDB

Length: 8ft

Pieces: 12pcs





3/8" ceramic to carpet adapters for use where (3/8") 10mm tile meets low pile carpet or other 1/4" flooring.

Finishes: BBR, BCL, SCA, SCP, SGA, MIL, SBK, STI, SDB

Length: 8ft

Pieces: 12pcs




1/2" ceramic to carpet adapters for use where (1/2") 12.5mm tile meets low pile carpet or other 1/4" flooring.

Finishes: BBR, BCL, SCA, SCP, SGA, MIL, SBK, STI, SRB

Length: 8ft

Pieces: 12pcs




5/16" Tile Reducer for use with (5/16") 8mm tile. The moulding has a sloped face to create a smooth transition between (5/16") 8mm tile and (1/8") 3.2mm adjacent surface such as resilient tile or sheet goods. Pre-punched for easy setting into adhesive.

Finishes: BBR, BCL, SCA, SCP, SDB, SGA, MIL, SBK, STI

Length: 8ft

Pieces: 12pcs




3/8" Tile Reducer for use with (3/8") 8mm tile. The moulding has a sloped face to create a smooth transition between (3/8") 8mm tile and (1/8") 3.2mm adjacent surface such as resilient tile or sheet goods. Pre-punched for easy setting into adhesive.

Finishes: BBR, BCL, SCA, SCP, SDB, SGA, MIL, SBK, STI

Length: 8ft

Pieces: 12pcsl





1/2" Tile Reducer for use with (1/2") 12.5mm ceramic tile. The moulding has a sloped face to create a smooth transition between (1/2") 12.5mm tile and (1/8") 3.2mm adjacent surface such as resilient tile or sheet goods. Pre-punched for easy setting into adhesive.

Finishes: BBR, BCL, SCA, SCP, SDB, SGA, MIL, SBK, STI

Length: 8ft

Pieces: 12pcs

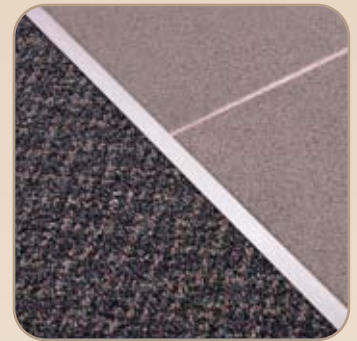

Sloped face creates a smooth transition between tile and adjacent floor coverings. The moulding has a 1/4" opening to allow adjacent flooring edge to be inserted and protected. The vertical leg provides protection to the edge of the ceramic tile. This moulding features an extended base which resists lifting of ceramic when downward pressure is applied to the face. Pre-punched for easy setting into adhesive.



Moulding has a sloped face to create a smooth transition between tile and (1/8") 3.2mm adjacent surface such as resilient tile or sheet goods. Pre-punched for easy setting into adhesive.