


# SECTION 2


## ALUMINUM SPECIALTY TRIMS



CM330

1/10" J - Moulding for use with materials up to 2.5mm (1/10") thick or for framing glass and mirrors.

Finishes: BBR, BCL, SGA, SCA, MIL, STI



CM1121

Tile Edge Cap for finishing the edge of tile or resilient floor. Accommodates materials from 0.080" up to 1/8" thick.



Finishes: CVG, HGA, HSI



CM1124

Sub Floor Reducer. This item is specifically designed to reduce sub-floors up to 3/8" thick but can also be used for flooring materials such as laminate, ceramic, and parquet. Fastening holes are drilled on sloped face. This allows laminates to float freely and eliminates the need to drill through tough materials like ceramic.

Finishes: HSI, HGA



SECTION 2



CM1122

Resilient Flooring Cap. Used when coving sheet goods up the wall to finish off the exposed edge. For materials up to 2.5mm (1/10") thick.


Finishes: SCA, SGA, HGA, HSI, MIL



CM1125

Resilient Flooring Cap. Used when coving sheet goods up the wall to finish off the exposed edge. For materials up to 3.2mm (1/8") thick.


Finishes: MIL, SCA, SGA



CM3330

Resilient flooring cove moulding for use at the floor/wall transition to provide a coved finish. Can be sealed with silicone to offer excellent resistance to dirt build up. Accepts materials up to 2.5mm (1/10") thick



Finishes: MIL, SCA, SGA, STI




CM3340

Resilient flooring cove moulding for use at the floor/wall transition to provide a coved finish. Can be sealed with silicone to offer excellent resistance to dirt build up. Accepts materials up to 3.2mm (1/8") thick

Finishes: SGA, SCA, MIL




ALUMINUM SPECIALTY TRIMS



CM1155

7/8" wide Hatch Cover moulding. Used to cover gaps in the floor where hatch covers are installed.


Finishes: BBR, BCL, SCA, SGA, MIL, STI



CM1156

Can be used between ceramic, hardwood and laminate floors of equal heights. Where expansion is expected


Finishes: SCA, SCP, SGA, MIL, STI



CM1157

Vinyl Hatch Cover: Can be used between ceramic, hardwood and laminate floors of equal heights. Where expansion is expected.

Finishes: BGE, BLK, BRN, SGY



CM1163


3/4" X 3/4" Angle for use on corners to protect edge.

Can also be used as an accent. Can be drilled. Also available:

1162 (1/2" x 1/2")

1164 (1" x 1")

Finishes: BBR, BCL, SCA, SGA, MIL, STI



COCOMAT (CM3200)

Cocomat Edging to secure cocomat or other floor coverings up to 3/4".

Jaws squeeze shut to trap material and double faced tape is used to fasten it to the floor.

Finishes: SCA, MIL



STRAIGHT EDGE (CM3210)

2-1/4" wide grooved Straight Edge. Grooves prevent tool from moving by biting into carpet. Allows carpet technician to cut carpet up to 12 feet wide.



Clear Anodized to prevent marking carpet.

Finishes: SCL

SE 29" SE 75"

SE 36" SE 84"

SE 150"

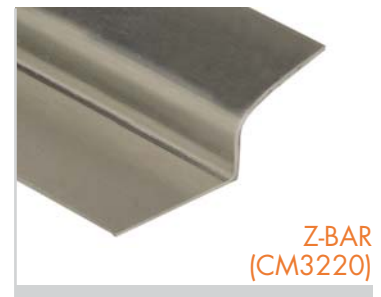

Z-BAR (CM3220)

Offset hearth metal for installing carpet around fireplaces. Provides grip while remaining invisible.

Finishes: MIL

