

COLONIAL BASE

Colonial Style Base is a flexible, PVC wall base that replicates painted, sculpted wood base molding.

Colonial Style Base is more cost-effective than traditional wood base and is great for remodel or new construction in commercial and industrial settings. It is dent and scratch resistant and requires no painting.

Colonial Style Base's flexibility makes it great for straight or curved walls while hiding imperfections. The 4 1/2" height covers over previous 4" base installations for a clean, fresh look.

50 foot seamless rolls are perfect for large areas. Making straight, mitered, or inside and outside corners are easily done.

No nailing, priming, painting needed. Base will stand firm against dents, scratches, mildew, and cracking.



EB450

Heavy gauge rubber base. Smooth satin finish and intrinsic flexibility helps hide substrate irregularities. Available in continuous rolls. Available in white. Deep grooves and several uniquely-shaped surfaces simulate milled wood moldings.



Available: WHT
Length: 50ft rals



QR6875

Dent and water resistant, super strong self adhesive with no nails or caulking required. Product adheres to all clean and dry surfaces. Saves installation time, easy to cut and paintable.

Available: WHT
Length: 12ft
10 pcs per tube

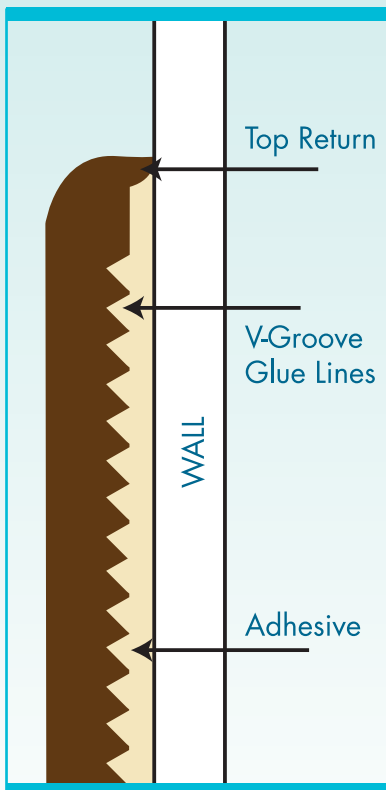

RUBBER BASE SPECIFICATIONS

Flooring accessories shown in the finishing schedule as RUBBER WALL BASE shall be high resin content rubber modified wall base as manufactured by Loxcren. All rubber base shall be a height of ___ (Specify 2 1/2", 4", or 6") and a length of ___ (Specify 4 foot strips or 120 foot coils) in ___ (Specify toe or toeless) style. The wall base shall conform to the performance specifications of CSA-A126.5 and to Federal Specification ASTM F1861-98. The wall base shall be supplied free of surface blemishes and imperfections. Only premium quality wall base adhesives will be used for installing this product. Use of any other adhesive will void the Loxcren warranty.

VINYL BASE SPECIFICATIONS

Flooring accessories shown in the finishing schedule as VINYL WALL BASE shall be high resin content vinyl wall base as manufactured by Loxcren. All vinyl base shall be a height of ___ (Specify 2 1/2", 4", or 6") and a length of ___ (Specify 4 foot strips or 120 foot coils) in ___ (Specify toe or toeless) style. The wall base shall conform to the performance specifications of CSA-A126.5 and to ASTM F1861-98. The wall base shall be supplied free of surface blemishes and imperfections. Only premium quality wall base adhesives will be used for installing this product. Use of any other adhesive will void the Loxcren warranty.